




## MTX SERIES: MULTISTANDARD MULTIMODE DIGITAL & ANALOG TERRESTRIAL TV TRANSMITTER LINE

### CONFIGURATION EXAMPLE:

3KW VHF ANALOG TV TRANSMITTER (SINGLE DRIVER – SINGLE AMPLIFIER)

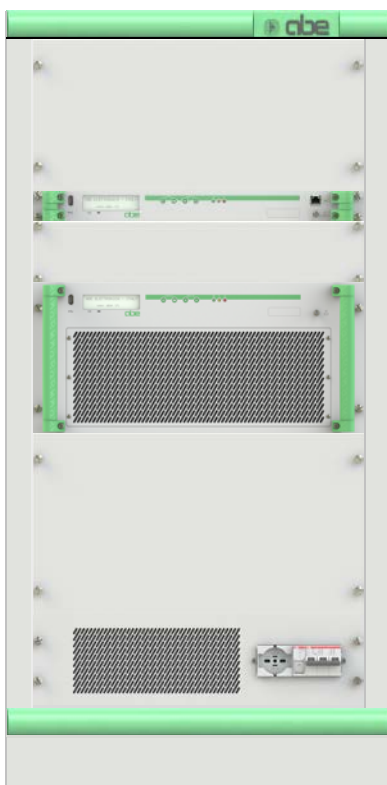

Output filter

MTX – Driving Unit

Amplifier 3.3KW

Mains switch


The “MTX” is a Software Defined Radio Transmitter /Transposer Series easily configurable or re-configurable as analog or digital multistandard unit.

ANALOG - DVB-T/H - DVB-T2 - ISDB-T/Tb - ATSC





## MTX A 3K /V BLOCK DIAGRAM

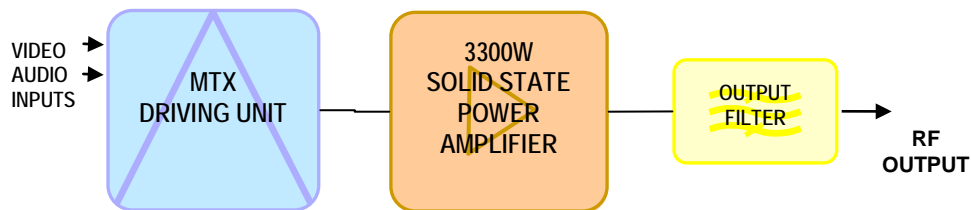

### MTX A 3K /V Standard specification

#### GENERAL SPECIFICATIONS

Output frequency range:	VHF 175 to 230MHz in 1Hz steps
Output Power (after filter):	3000W p.s. (tol. +0/-1dB)
Output connector:	Flange 1+5/8"
Housing:	Rack Cabinet 19" 25U; dimension: 570 x 1250 x 870 mm (W x H x D)
Power consumption:	<7.5KVA (typ. 6.8KVA)
Power supply:	400 Vac $\pm$ 10% 50/60Hz three phases (option: single phase) (different power supplies and tolerances available on request)

#### Notes:

For standard specifications and general description, please refer to "MTX series" brochure.  
For TV transmitter driver technical specifications please refer to "MTX series – driving unit" brochure.

All specifications contained in this document may be changed without prior notice.