




Swiss precision for excellent audio quality

# VOICE TECHNOLOGIES

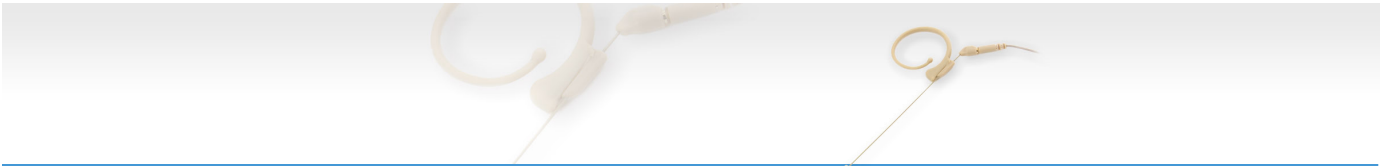

## VT901MKII Earhanger Microphone

[Fits perfect, hardly seen, sounds ideal.](#)

The VT901MKII is a new extremely light earhanger microphone that offers exceptional voice transmission and superb wearing comfort. The VT901MKII boasts a specialized super-miniature omni capsule producing very natural speech and vocals. The successor of the VT901 has been developed based on customer feedback – the cable now runs directly along the head of the user. This makes it even more discreet when being used on stage, during broadcast productions and for presentations, without affecting the ergonomic design. The soft “spiral ear fastener” gives any user the perfect fit every time without the fear of it slipping off. The VT901MKII can be worn either on the left or the right ear. The high wearing comfort is achieved through the low weight as well as through its very flexible material; thus the microphone is comfortable even after many hours. The cable is removable and can be easily exchanged to swap connectivity between different wireless systems. This must-have design feature for rental houses also benefits individual users who have backup wireless systems by different brands. The spiral ear-wrap section can be exchanged as well.

Colors: beige

Application area: [Vocals - Broadcast - Stage](#)

The VT901MKII comes in a transparent box with the following accessories:

|  |                   |  |
|--|-------------------|--|
|  | AC400             | Colors: beige or black                         |
|  | WSi701/901        | Miniature Windscreen<br>Colors: beige or black |
|  | WS701             | Windscreen<br>Colors: beige                    |
|  | VT701/901/910 Box | Transparent box size 164x164x12mm              |

Audio Bauer Pro AG, Bernerstrasse-Nord 182, CH-8064 Zürich, Switzerland  
Phone: +41 44 432 32 30, Email: [info@vt-switzerland.com](mailto:info@vt-switzerland.com)

[www.vt-switzerland.com](http://www.vt-switzerland.com)

| Specifications      |                                    |
|---------------------|------------------------------------|
| Generating Element: | Electret Condenser                 |
| Polar Pattern:      | Omni-Directional                   |
| Frequency Range:    | 20-20'000Hz                        |
| Sensitivity:        | -35dB ±3dB 1V/microbar (17.8mV/Pa) |
| Noise Level:        | 25dB "A" weighted                  |
| Max. Input SPL:     | 125dB                              |
| Impedance:          | 2 kOhm                             |
| Bias/+VDC:          | 0.8-5V                             |
| Colors:             | beige                              |
| Cable:              | Length 1,2m Ø 1.3mm                |
| Weight:             | 5 g                                |

| Wiring configuration (2-wire): |        |
|--------------------------------|--------|
| Red                            | +VDC   |
| Copper                         | Ground |

